



10A

SLIP RING COLLECTOR

Slip ring collectors are sets of rings coupled with brushes designed to allow current to pass from a fixed to a rotating part. The 10A series is used mainly on small jib cranes and it has only 4 rings.

FEATURES

These units are suitable only for transmitting currents with 50/60 Hz supply frequency.

OPTIONS

Slip ring collectors are available with or without driving slot or with flange.



**INDUSTRIAL
LIFTING**



**CONSTRUCTION
LIFTING**



**INDUSTRIAL
AUTOMATION**

STANDARDS - MARKINGS - HOMOLOGATIONS

- Conformity to Community Directives:
 - 2006/95/CE: Low Voltage Directive
 - 2006/42/CE: Machinery Directive
- Conformity to Standards:
 - EN 60204-1 Safety of machinery - Electrical equipment of machines
 - EN 60309-1 Plugs, socket-outlets and couplers for industrial purposes
 - General requirements
 - EN 60529 Degrees of protection provided by enclosures
- Markings and homologations: **CE**


GENERAL TECHNICAL SPECIFICATIONS

- Storage ambient temperature: $-40^{\circ}\text{C}/+70^{\circ}\text{C}$
- Operational ambient temperature: $-25^{\circ}\text{C}/+70^{\circ}\text{C}$
- Protection degree: IP 00
- Insulation category: Class I
- Operating positions: any position
- Markings and homologations: **CE EAC**

ELECTRICAL SPECIFICATIONS

- Rated operational current: 10 A
- Rated operational voltage: 400 V
- Rated insulation voltage: 660 V
- Max. speed: 3 rev./min
- Connections: 6.3 mm Faston taps
- Markings and homologations: **CE**

OVERALL DIMENSIONS

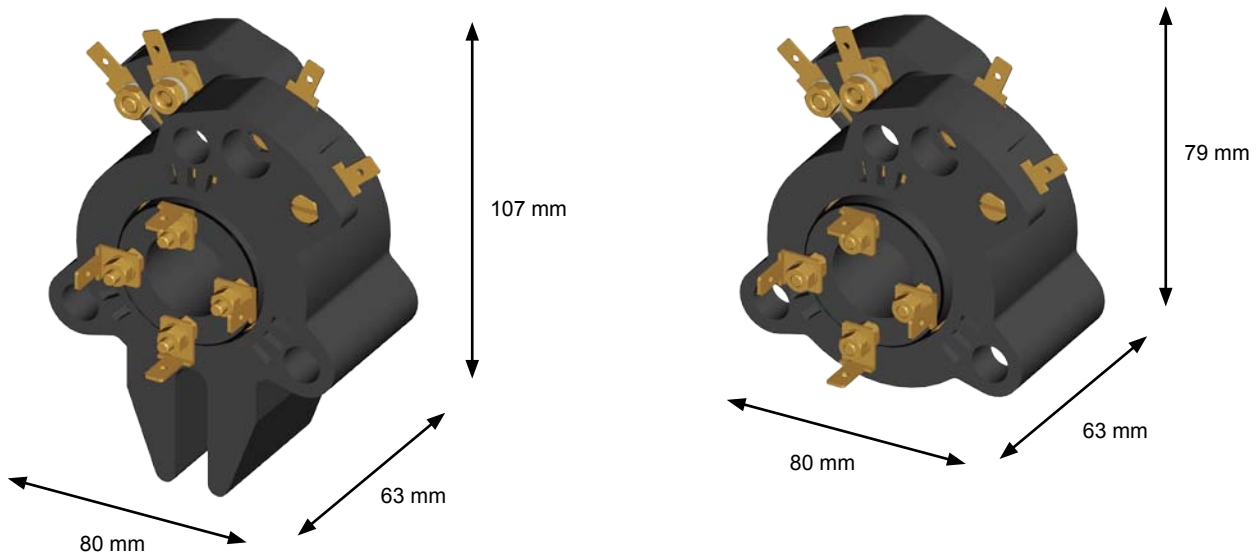

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.



TER Tecno Elettrica Ravasi srl

Via Garibaldi 29/31 - 23885 Calco (LC) - Italy
Registered Office - via San Vigilio 2 - 23887 Olgiate Molgora (LC) - Italy
Tel. +39 0399911011 - Fax +39 0399910445 - E-mail: info@terworld.com

www.terworld.com