


### Cero / Cero Plus


Cero and Cero Plus are superior entrance matting designed for buildings with high traffic usage. In service for many years, they have proven to stand up to extreme foot traffic. Cero / Cero Plus provide 24/7 protection and superior cleaning properties.

#### Features:

- Cero / Cero Plus effectively absorb and trap moisture, dirt and grease.
- Our nylon/high absorbent fiber yarn provides a durable and robust solution for commercial applications.
- The yarn's long lasting fade resistance maintains the mats' visual appeal while the thick pile provides a plush, cushioned feel underfoot.
- Cero Plus features additional bands of heavy-duty nylon monofilament fibers which provide exceptional scraping ability, facilitating the easy removal of coarse dirt/debris and enhance its durability.
- The specially formulated PVC compound backing provides a secure slip resistant base that will not let moisture leak through to your floor.

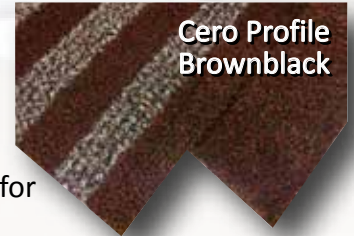

Cero Profile  
Brownblack



Cero Plus Profile  
Charcoal

#### Applications:

- Designed for prolonged daily use, they are best suited for high traffic areas such as lobbies, public entrances and hallways in hotels, public buildings, malls, hospitals, entertainment venues, etc.
- They are suitable for use as surface cover matting or in shallow mat wells.

### Product Specs – Cero / Cero Plus\*

- Cero Yarn type: Nylon-high absorbent fiber blend
- Cero Plus Yarn type: Nylon-high absorbent fiber blend with nylon monofilaments
- Pile construction: Tufted cut pile
- Pile height: Approx. 6.5 mm
- Pile weight: Approx. 700 g/m<sup>2</sup>
- Dyeing process: Solution dyed
- Backing: PVC compound
- Total thickness: Approx. 8 mm
- Total weight: Approx. 2.6 kg/m<sup>2</sup>
- Max. water temperature: 60°C/140°F
- Fire resistance classification: BS4790, CPSC FF 1-70, CAN/CGSB-4.2 No. 27.6-M91

\* Due to ongoing improvements of our mat products, we reserve the right to alter mat specifications as required.

**RISMAT (FLOORGUARD) MATTING SYSTEMS INC.**

11 - 130 Konrad Crescent • Markham • Ontario • L3R 0G5 • Tel. (905) 604-8116 • Toll Free (855) 881-8666  
[customerservice@floorguard.net](mailto:customerservice@floorguard.net) • [www.floorguard.net](http://www.floorguard.net)

# Rismat<sup>®</sup>

(FloorGuard) Matting Systems Inc.

## RECOMMENDED MAINTENANCE/CARE INSTRUCTIONS:

- Regular thorough cleaning using an upright vacuum cleaner is a must.
- Periodic cleaning by injection/extraction methods using a light to medium grade carpet extractor with soft brush power head
- Water temperature should not exceed 60°C/140°F
- Do not use floor scrubbers, floor burnishers, steamers, pressure/power washers.

## AVAILABLE SIZES:

- Custom sizes available (using standard 2 m wide rolls)



## LIMITED WARRANTY

- Cero and Cero Plus mats come with our manufacturer's 2 year limited warranty against defective materials and workmanship.

## RISMAT (FLOORGUARD) MATTING SYSTEMS INC.

11-130 Konrad Crescent • Markham • Ontario • L3R 0G5 • Tel. (905) 604-8116 • Toll Free (855) 881-8666  
[customerservice@floorguard.net](mailto:customerservice@floorguard.net) • [www.floorguard.net](http://www.floorguard.net)

