

# Wireless Remote Control Monitor




Protek's Wireless Remote Control Monitors are technologically advanced, electrically controlled deck monitors. Wireless remote control facilitates effective use of personnel and lowers the potential risk of injury from manual operations.

## Style 955

- Allows operator to control the stream from as far as 200 meters\* away from the monitor for safety and efficiency
- 3-1/4" waterway for flow rate of up to 1250 GPM
- Cast-in turning vanes for efficient flow and minimal friction loss
- 360° horizontal rotation
- Vertical travel 90° above 45° below horizontal
- Electric nozzle with an adjustable flow baffle
- Comes with Protek's electric monitor nozzle Style 855E
- Electronic controls with manual override
- Brushless electric motor designed to eliminate sparks and reduce risk of ignition
- Automatic power off function during inactivity for enhanced performance and safety
- Programmable automatic oscillation and stow position
- Standard 24V with optional DC power supply

		Style 955	
Max. GPM (LPM)		1250 (4800)	
Inlet	Size	3"	4"
	Type	Flange	
Outlet		2-1/2" (65mm)	
Control		Electric	
Material		Alloy	
Finish		Red Powder Coating	
Friction Loss		16 psi at 1250 GPM	
		12 psi at 1000 GPM	
Travel		135° Vertical	
		360° Rotation	
Weight		33 Lbs. (15 kgs)	

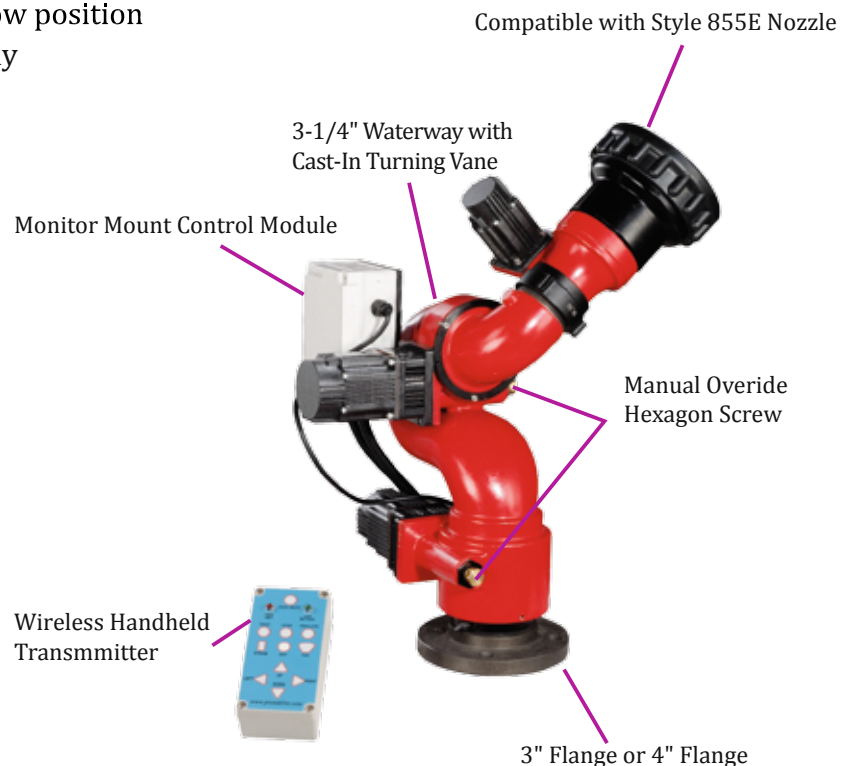

\* Remote control distance is subject to free transmission obstructions and battery discharge.

**Style 955 monitor shown with standard accessories: Style 855E nozzle, monitor mount control module and wireless handheld transmitter**

# Wireless Remote Control Monitor



Wireless Joystick Control



3" Electric Valve



## Optional Accessories:

- 3" Electric Valve
- Wireless Joystick Control
- DC Power Supply

855E Electric Nozzle



## Specification

Style	Material	Pattern Control	Flow @ 100 psi (7 BAR)		Teeth	Inlet	Weight Lbs (kg)
			GPM	LPM			
855E	Alloy	Electric	300-1250	1140-4800	Spinning	2-1/2" (65 mm)	12 (5.5 kg)