



Schucu UG
(haftungsbeschränkt)

Product Datasheet: Oil Absorbent Mat for Water

Application: Safe absorption of oil for lakes, rivers and the sea: even from waves. Mats are positioned by hand or pulled over the contamination using a tow bar behind boats.

New technology: Without pores but stronger molecular power

- Clean water surface while preventing spread of contamination
- works even in rough waters on open sea
- you can clean port areas, jetties, shorelines with "little water mat"
- work in areas, where skimming is not possible: **Possible belt size 5 m * 100 m**

Features: Oil binders sturdy with woven geo textile, tabs for coupling


- Save binding of approximately 13 L of oil / m²
- Thickness = 0,9 mm; Weight = 4 kg / m²

How it works: *Contamination is kept in mats and does not rinse out again with van der Waals' power*

Design / Accessories: Oil absorbent mats arbitrarily coupled in length and width. Standard Width: 1 m; Standard length: 3 m, 6 m, 9 m; tow bar, 3.6 -6 m

- "Little water mat"; B * L = 0.5 m * 1.2 m
- Oil protection mat as alternative to booms: 30 cm wide absorbing zone; coupled in length and width. Standard lengths: 3 m-25 m.

Admission: Type I, II SF, No. 22 000 9704 13.

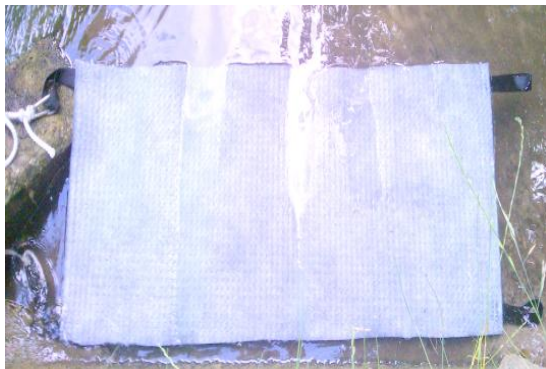

"little water mat" for port areas, shorelines 3 m oil absorbent mat with drag bar



25 m oil protection belt instead of booms



30 cm width oil protection belt absorbs and stops contamination at the same time