



## Oil Boom 250 WDF / F

Art. No. 01.250.xxx

### Product

The oil boom 250 WDF or F is a flexible solid-state oil boom.

It is available in standard lengths of 5 – 10 m. On request, special lengths can be delivered.


The oil boom 250 WDF can be winded and driven on all customary oil boom winders.

The collapsible version of the solid oil boom 250 F can be packed in carrier bags or lorried on oil boom transport trailers. It is recommended for operations on smaller rivers (20 – 30 m breadth).


The oil boom 250 WDF gets its buoyancy and dimensional stability by means of resistant floats of plastic and flexible levelling pieces. The water proof and oil resistant outer skin consists of plastic coated carrier fabric which provides a high ultimate tensile strength. Oil and water-proof valves guarantee an optimal ventilation and aspiration.

Welded carrier handles facilitate the transport by hand and the setting into the water and allow the connection of further equipment (buoys, Mopmatic-rolls).

### Technical data

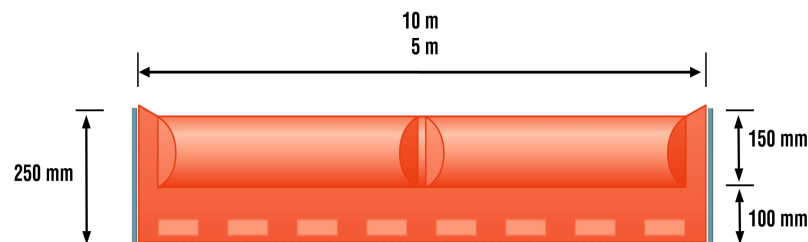

material:	PVC coated polyester carrier fabrics, 900 g/m <sup>2</sup>
floating body:	PS 15 / PE diameter 150 mm
ballast weights:	sinker
fall height:	250 mm
draught:	approx. 120 mm
swimming body:	diameter 150 mm x 250 mm
weight:	approx. 4 kg/m
coupling system:	aluminium link coupling bar
standard lengths:	5 and 10 m



# UMWELTECHNIK

## Oil Boom 250 WDF / F

Art. No. 01.250.xxx



### Operative range

The oil boom 250 WDF / F is an oil boom for immediate action on all inland waters and especially appropriate for middle-sized rivers and small lakes.

Due to its low draught (120 mm) it is excellently suited for an application in shallow and fast flowing waters (rejecting oil boom).

### Equipment

A detailed equipment system guarantees optimal efficiency under various conditions (bank adjustments for different water levels, different tail ends, connection ends for other blocking systems etc.).

As per equipment and spare-part list

### Delivery time

On request

Horlecke 34 – 38 · D-58706 Menden  
Fon: +49(0)2373-770099-0 · Fax: +49(0)2373-770099-9  
www.alles-optimal.de · info@alles-optimal.de