

Oil boom 900 L

Art. No. 1.900.xxx


Product

The oil boom 900 L is an inflatable oil boom. It is recommended for application on sea harbours and protected coastal areas.

It can be delivered in standard lengths of 5, 10, 15 or 20 running metres. Other lengths are available on request.


The oil boom 900 L is windable and can be run on all standard oil boom hasps. Due to an inflatable inner hose (film, 0,8 mm), the oil boom 900 L is given buoyancy and natural stability.

The outer covering, which is oil-proof and watertight, is made of a PU-laminated carrier fabric of high tear-resistance. The valves, protected against oil and water, grant an optimal aeration and de-aeration.

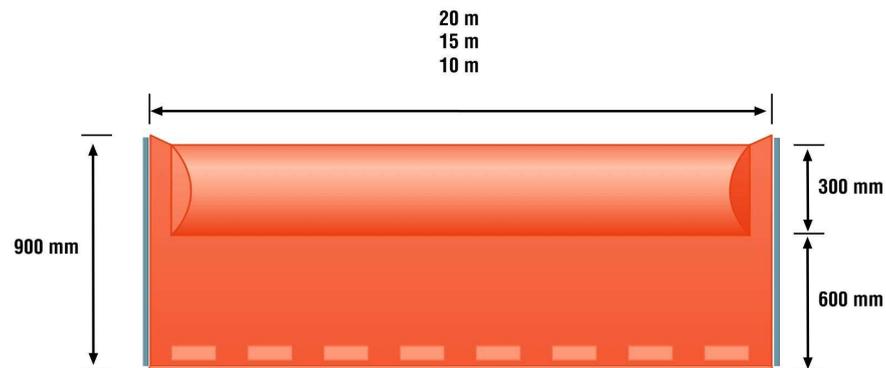

Technical data

Material:	carrier fabric made of polyester, 1200 g / square metre PU-laminated
Floating body:	air hose 300 mm, \varnothing appr. 300 mm
Ballast weights:	sinker
Total height:	900 mm
Draft:	appr. 600 mm
Free board:	appr. 270 mm
Weight:	appr. 6 kg/m
Coupling system:	aluminium coupling
Lengths:	5, 10, 15 and 20 m

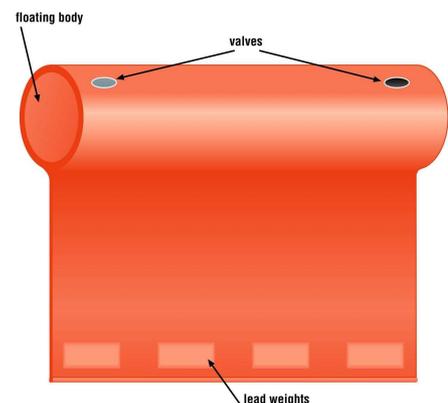



Oilboom 900 L

Art. No. 01.900.xxx



Examples of an oil boom operation by means of an inflatable oil boom

Operative range

The oil boom 900 L is a quick-action boom for coastal areas, especially for harbours and protected coastal waters. Due to its flexibility and the relatively big floating body of 300 mm, the oil boom 900 L has a strong power of retaining oil even in case of moderate waves (passing ships, wind etc).

Additional equipment

A comprehensive system of additional equipment guarantees an optimal efficiency regarding various fields of application, such as adaptations of banks and water levels, different tail pieces or adapter pieces to other boom systems etc.

Also deliverable as collapsible solid oil boom 900 F.

Time of delivery

on request