




Schucu UG  
(haftungsbeschränkt)

## Product Datasheet: Oil absorbent mat / Workshop mat with protective film

Application:	For secure oil, paints, varnishes, battery acid to 38% uva <ul style="list-style-type: none"><li>• For indoor and outdoor areas.</li><li>• For roads and water</li><li>• For machines, hydraulic system, wrecks, etc.</li><li>• Mat is placed under the preventive leakage point</li><li>• Quick and easy <b>decontamination equipment</b> e.g. for dirty tires of emergency vehicles.</li><li>• On water mats are used instead of hoses as oil boom</li></ul>
Features:	Absorbs app.10-12 L of oil per m <sup>2</sup> official test result MPA* Dortmund <ul style="list-style-type: none"><li>• Water-repellent</li><li>• Wind Resistant</li><li>• Thickness = 0,9 mm; Weight = 3.5 kg / m<sup>2</sup></li></ul>
construction:	4 Layers of material, strong structure out of geo textile and woven oil binder plus bottom with safety film as leakage protection.
How it works:	"van der Waals forces" keep oil contamination in the mat without being washed out again. Even strong pressure does not spill out pollution from mats.
Dimensions:	Endless rolls up to 25 m length and 1.2 m width, single mats in different sizes: <ul style="list-style-type: none"><li>• Large mat: B * L = 0.8 m * 1.2 m</li><li>• Small Matte: B * L = 0.4 m * 0.6 m</li><li>• Reel narrow: B * L = 0.6 m * 0.6 m and 12.5 m * 25 m</li><li>• Reel width: B * L * = 1.2 m to 12.5 m and 1.2 m * 25 m</li></ul>
Admission:	Type I, II SF, No. 22 000 9704 13.



Oil drip mat with safety foil and filled with binder

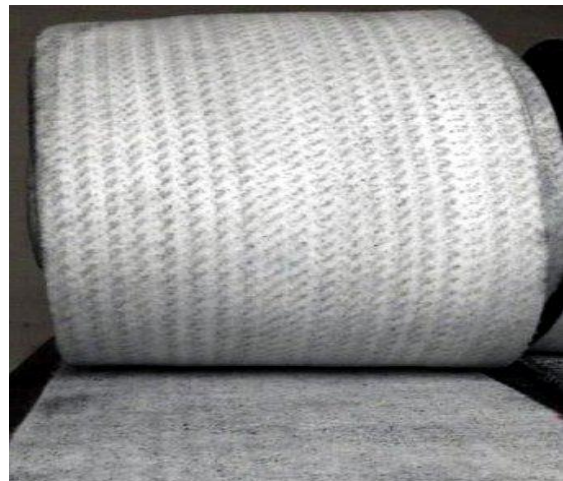

Roll of oil drip material with safety foil on bottom

\*MPA=Material approval institute, which is approved to test oil binders for use of community apply  
All details are subject to our terms and conditions. All specifications as dimensions, colors, etc. are indicative and not property commitments. We reserve the right to change due to product developments. Date: 27.01.2015. Please contact us on +49 5257 924112 and [info@schucu.de](mailto:info@schucu.de); [www.oil-absorbent.de](http://www.oil-absorbent.de)